



62CNC

B&K Springfield Vertical Grinder Rail Type

VERTICAL GRINDER


STANDARD MACHINE SPECIFICATIONS

CNC Vertical Grinder, Rail Type for internal/ external grinding of cylindrical workpieces, using a GE Fanuc 21iT CNC control with linear and circular interpolation, inch-metric programmable, absolute and incremental programming providing:

- Rapid traverse on both vertical and horizontal axes
- Vector Grind interpolation of x and z axes for taper grinding
- Vertical Oscillation with horizontal feed and tarry and dwell
- Continuous feed in both horizontal and vertical directions
- Gap Elimination
- Standard Cycles

Technical Data - Capacities & Limits	
Work spindle maximum swing	68 in
Work spindle speed	5-100 rpm
A2 spindle nose - ASA standard	20 in
Accuracy, run-out and camming at spindle nose	0.0003 in
Grinding head nominal hole depth	24.5 in
Grinding head stroke	27.5 in
Clearance over work table	12-48 in
Slide traverse rates for X and Z axis	300 ipm
Slide feed rates for X and Z axis	.0001 in - 50 in
Coolant capacity	50 gal
Weight (Approximate Net)	50000 lbs

Technical data is subject to change without notice.

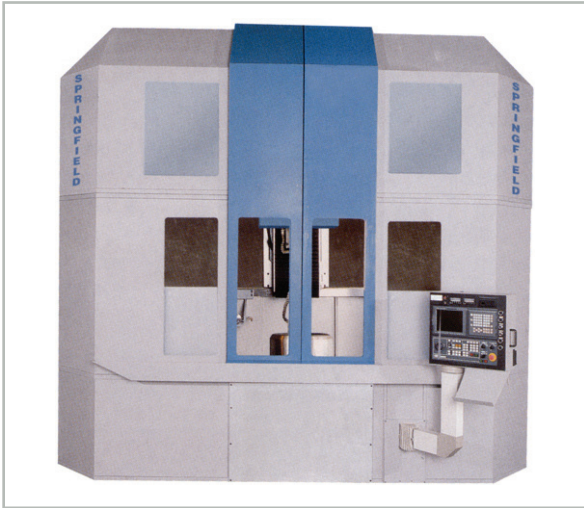

Machine with Full Enclosure



Machine with Standard Guarding

Actual machine W-H-L and Weight depend on ordered configuration. Technical data is subject to change without notice and may vary according to the workpiece geometry and options supplied. Workholding equipment supplied.



62CNC

B&K Springfield Vertical Grinder Rail Type

Standard Equipment	
Description	
Heavy stress-relieved steel weldment base	
Self-contained work spindle	
Cross slide and grinding head	
Vertical columns are heavy, one-piece castings of high grade	
Cross-rail elevating mechanism	
Automatic CNC controlled lubrication	
Coolant system, including pump, motor, piping, valves, settling tank	
Single point dresser	
+/-45° vertical slide swivel	
Heidenhain linear scale feed on both axes	
GE Fanuc 21iT CNC	
Gap eliminator	
Standard grinding cycles	
Frequency variator of table and spindle variable speeds	
Splash guard with manual doors and safety interlocks	
Leveling screws	
Centralized lubrication system	
Paint: One standard Polane color	
Documentation	
Manufactured in USA	
Standard Equipment Total (\$):	

Optional Equipment	
Description	Price (\$)
62" diameter work table	
4" face plate jaws	
Dial indicator angle setting attachment	
Rotary diamond roll dresser	
Disposable media type filtration system	
Hydraulic acutating equipment	
Heavy-duty cartridge type grinding spindle (7700 RPM, Model 3602)	
Heavy-duty cartridge type grinding spindle (4300 RPM, Model 3613)	
Extra grinding spindle pulleys	
Extra grinding spindle belts	
Wheel guards for O.D. grinding	
Full machine enclosure	
Additional machine manuals	
Manual or electro magnetic chuck	
Extra 36" stroke of grinding (in lieu of standard)	
Extra height 12-48" clearance over work table with 36" stroke	
Extra one foot rail travel – with standard 27.5" stroke	
Extra one foot rail travel – with optional 36" stroke	
Condensed training (no charge)	
Operator/setup course (24 hours)	
Mechanical, lubrication, maintenance, troubleshooting course	
Electrical, electronic maintenance, troubleshooting course	
Operator training, machine setup assistance, in-plant training	
Optional Equipment Total (\$):	

Total Cost:	
Standard Equipment Total (\$):	
Optional Equipment Total (\$):	
TOTAL (\$):	

Submit a
QUICK QUOTE Request



Star SU LLC
5200 Prairie Stone Parkway, Suite 100
Hoffman Estates, IL 60192
USA
Tel.: 847 649 1450
Fax: 847 649 0112
sales@star-su.com



BOURN & KOCH INC.
2500 Kishwaukee Street
Rockford, IL 61104
USA
Tel.: 815-965-4013
Fax 815-965-0019
sales@bourn-koch.com