



GEAR CUTTING TOOLS



ROUGHING | FINISHING
CHECKING | RECONDITIONING



OUR AIM IS SIMPLE
to bring an economic surplus
to your daily manufacturing life.



TABLE OF CONTENTS

P4	Hobs	P16-17	Shaving Cutters
P5	Worm Gear Hobs	P18-19	Master Gears
P6	Hobs for Large Gears & Rotors	P20	Rolling Racks
P7	Milling Cutters/Saw Blade Cutters	P21	Coating Technology
P8-9	Shaper Cutters	P22	Coatings
P10-11	Power Skiving Tools	P23	Standard Coatings Guide
P12-13	Chamfer Hobs	P24-25	With You Throughout the Life of Your Tool
P14-15	Chamfering, Deburring & Rolling Tools	P26	Stay Connected

THE WHOLE WORLD OF GEAR MANUFACTURING TOOLS IN YOUR HANDS

Star SU is the marketing, sales, and service partner for Star Cutter Company in North America, South America, Europe and the Far East. It designs, manufactures and supplies a comprehensive range of tools and services for the production of gears, shafts, worms, rotors and other screw-type workpieces.

The Star Cutter family of companies is a provider of custom-engineered tooling solutions and machine tools for precision applications. Founded in 1927 by Howard B. Lawton and headquartered in Farmington Hills, MI (USA), it has over 700 employees working in 15 manufacturing facilities.

Our tools are manufactured in state-of-the-art production plants, according to the latest process technology. If the gear cutting tool or measuring device you require is not included in our catalog, please do not hesitate to contact us for help. Our experienced engineers will readily support you with solutions that ensure you produce efficiently at all times.

HSS AND CARBIDE HOBS

CREATING QUALITY EFFICIENTLY

Hob Types

- Involute gear hobs
- Bore and shank-type hobs
- Multi-gash and multi-start hobs
- Special profiles/profile modifications
- Hobs for special drives
- Chain sprocket hobs
- Worm gear hobs
- Large module hobs
- Hobs for splines and timing belt gears
- Finishing and pre-finishing hobs
- Heavy duty hobs

Quality

- A DIN 3968
- AA DIN 3968
- AAA AGMA
- AAAA ISO
- AGMA 1102-C19
- ISO 4465:2020

Modifications

- Tooth tip chamfer
- Protuberance
- Topping/Semitopping
- Full radius
- Tip/root relief
- Pressure angle
- Other modifications

Designs & Dimensions

Depending on your application, we optimize tool geometry in terms of diameter, number of gashes and number of starts in the following ranges:


- Module range 0.45-22.0 mm
- Diameter range 40-300 mm
- Usable length, max. 400 mm
- Larger modules on request

Material

- High-alloy HSS-PM steels
- Carbides
- MC90

Recommended Coatings

- TiN (Gold)
- TiAlN (Futura Nano)
- AlCrN (Alcrona Pro)
- AlCrN-based (Alcrona EVO)
- AlCrNX (Altensa)
- Other coatings upon request



WORM GEAR HOBS

A wealth of experience in special gear applications and extensive testing on many different hobbing machine makes means that Star SU worm gear hobs are tailor-made to your needs.


Due to the nature of this application, our engineering department checks all inquiries for feasibility and optimizes tool functionality, taking into account your specific clamping needs and the optimum usable cutting length of the tool.

- Module range: 1.0-6.0 mm
- Helix angle, max. 20 degrees
- Length, max. 500 mm
- Shaft diam. min. 8 mm

Other dimensions and a wide variety of shaft tapers are available on request.




HOBS FOR LARGE GEARS & ROTORS

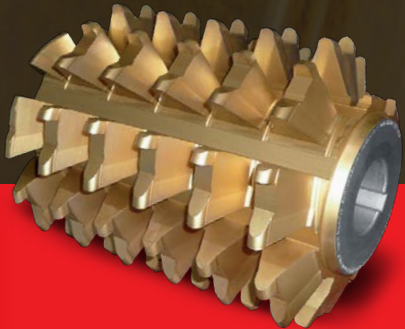

Star SU offers cutting edge technology for hobs for large gear modules.

Heavy duty hobs are also available, with a maximum of 3 cutting blades per tooth.

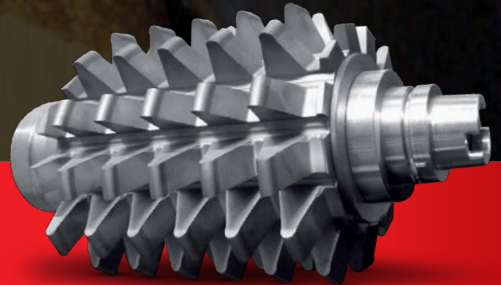

We recommend the best tool for your particular gear cutting job by finding the right tradeoff between productivity, lot size, tool cost and cost per piece.



- DIN 3972, BP II / with protuberance
- Module 6.0 - 22.0 mm

Also available in heavy-duty design with up to 3 cutting blades



MILLING CUTTERS

INCLUDING SAW BLADE & RACK CUTTERS

We offer our customers high-precision, form-relieved milling cutters for saw blades and other special forms on request.

Depending upon the application, we develop custom designs for the milling cutters to ensure a high performance and quality. All our ground milling cutters, saw blade cutters and rack cutters are produced with pitch accuracies of less than 5µm and tool length over 250 mm.

With our designing software capabilities, we ensure a constant profile shape after every resharpener process.

Our saw blade cutters are the number one choice for precision in pitch, runout and tooth height. These tools have a single or variable pitch and can produce hacksaw, bandsaw and circular saw blades.

Our unique production process provides the maximum usable tooth length. This is especially important on high-hook angle blades where the tooth length is very short on the small diameter cutter end.

MILLING CUTTERS AT A GLANCE

Types

- Bore and shank
- Straight and crowned forms, cutters for steering racks
- Interlocked sets
- Single piece circular
- Intermittent continuous feed
- Special tooth forms incl. chip breakers
- Single and duplex milling cutters
- Saw blade milling cutters
- Multiple thread milling cutters
- Special form milling cutters
- Rack milling tools
- Unground and ground forms
- Standard or precision quality

Dimensions

- Module: up to 16
- Diameter, max. 250 mm
- Length, max. 300 mm
- Spiral gash, max. 20 deg.

Coatings

- TiN (Gold)
- TiAlN (Futura Nano)
- AlCrN (Alcrona Pro)
- AlCrN-based (Alcrona EVO)
- AlCrNX (Altensa)
- Other coatings upon request



MORE THAN 100 YEARS OF COMBINED SHAPER CUTTER EXPERIENCE

Our wide range of shaper cutter types features the brands Fellows and Star-SU with the combined experience of more than 100 years in shaper cutter design and manufacture.

Shape Cutter Types

- Disc-type
- Deep counterbore-type
- Shank-type
- Special cutters for sprockets, cams, splines, timing bells and large modules
- For intermittent or block teeth
- For pre-finishing
- For finishing
- Unground version also available

Dimensions

- Module: min./max. 0.5-16.0 mm
- Max. diameter 320 mm
- Other dimensions on request

Standard Bore Diameters

- 31.750 mm
- 44.450 mm
- 70.000 mm
- 100.000 mm
- Other bore diameters on request

Taper Shanks

- MK K 2
- MK K 3
- MK K 4
- FK 1
- FK 2

Standard Profiles

- DIN 3972 - BP I
- DIN 3972 - BP II
- DIN 3972 - BP III
- DIN 3972 - BP IV
- DIN 5480
- BS 2062

Profile Modifications

- Semi-topping
- Protuberance
- Topping
- Modification of flank for tip and/or root relief on gear
- Modification of pressure angle
- Combination of several of the above modifications

Quality

- A DIN 1829
- AA DIN 1829

Material


- HSS-PM steels
- Super Alloy HSS
- Carbide

Coatings


- TiN (Gold)
- TiAlN (Futura Nano)
- AlCrN (Alcrona Pro)
- AlCrN-based (Alcrona EVO)
- AlCrNX (Altensa)
- Other coatings upon request




Disc Shaper Keyway Types



Type A
without
keyway




Type B
longitudinal
keyway




Type C
clutch
keyway




Type D
keyway, not
aligned



Type E
keyway aligned
on tooth
vane axis



Type F
keyway
aligned on
tooth axis

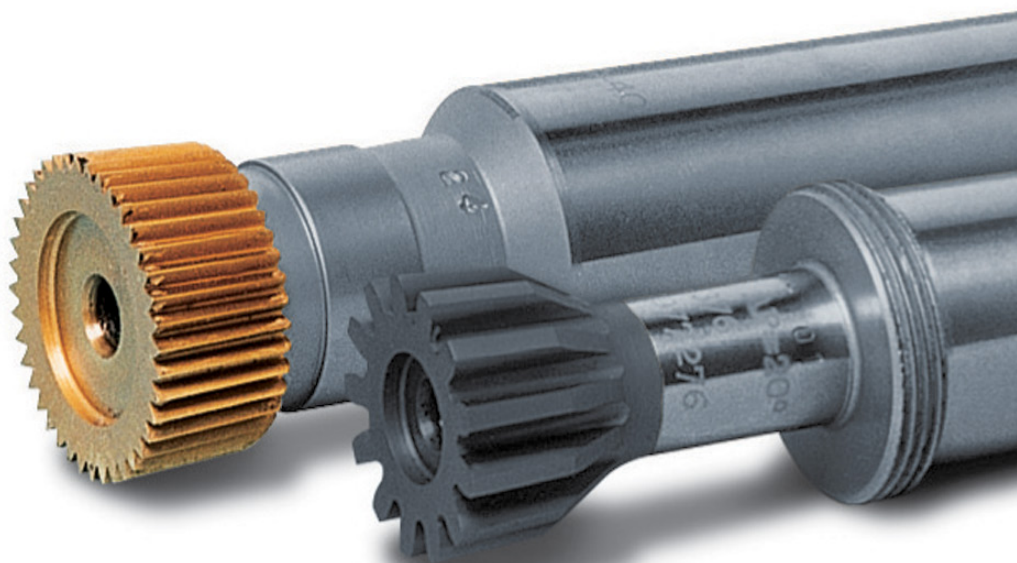

POWER SKIVING TOOLS

HIGHEST LEVEL OF PRODUCTIVITY

Power Skiving is a continual gear cutting process which makes both the production of external and internal gears, as well as spur and helical gearing possible.

The great advantage of Power Skiving Technology is that it allows the machining of internal or external gears/splines without the need of an undercut or groove. The end of the gear can be a defined/programmed ramp or radius.

Power Skiving can compete with shaping, broaching, and other gear cutting processes to produce gear and spline teeth for reduced cycle times and tool costs.

Application

- Spur and Helical Involute Gears and Splines

Tool Types

- Wafer
- Disk
- Shank

Material

- PM HSS
- Super Alloy HSS
- Carbide

Coating

- AlCrN (Alcrona Pro)
- AlCrN-based (Alcrona EVO)
- AlCrNX (Altensa)
- Other coatings upon request



QUICKER, MORE EFFICIENT AND PRODUCTIVE

The high number of cuts per time unit not only leads to a very short cycle time, it produces high quality gears with a low surface roughness.

We produce Power Skiving tools for all solutions and machines present on the market.

Gear Quality: DIN 5-7

Surface Roughness: Rz 1-5

Modules: 0.4 - 6

Max. Diameter – HSS: 250 mm

Max. Diameter – Carbide: 150 mm

Max. Shank Size: 150 mm

Bore Size Options: 16 – 44.45 mm

- Other bore diameters upon request



Skiving Shank
Cutter



Skiving Wafer Cutters



Skiving Disc
Cutter

CHAMFER HOBS

HIGH PRECISION CHAMFERING TOOL

In gear manufacturing, every detail matters.

As industries move toward high-speed, high-precision applications, chamfer accuracy becomes critical to achieving optimal performance, long-term reliability and quieter operation.

Backed by decades of experience in gear cutting and finishing solutions, Star SU engineers each Chamfer Hob to deliver measurable improvements in cost, quality and productivity.

Star SU Chamfer Hobs offer a proven, high-performance solution that combines chamfering and deburring in a single, continuous hobbing process, delivering superior accuracy, extended tool life and lower operating costs.

KEY ADVANTAGES

- **Perfect Chamfers**
Burr-free, high-precision profiles without deformation.
- **Extended Tool Life**
HSS tool body can be resharpened and recoated multiple times to extend service life.
- **Production Flexibility**
Full or partial chamfers, even in challenging gear geometries and limitation of interference.
- **Reduced Cycle Time**
Single-cut hobbing lowers costs and improves throughput.
- **Optimized for Finishing**
Prevents damage to grinding wheels and honing tools.




ENGINEERED FOR PERFORMANCE

Each Chamfer Hob is engineered using Star SU's proprietary 3D kinematic simulation software to ensure a precise match between tool geometry, gear profile, machine setup, and application requirements.

Fully interchangeable with tools from other manufacturers and ready to run on any chamfer-hobbing machine, no modifications are required for fast, seamless integration into existing production environments.

Supported by Star SU's precision reconditioning services, tools can be resharpened and recoated multiple times to extend life, maintain like-new performance, and deliver consistent value throughout their service life. Each tool is supplied with a dedicated setup sheet and resharpening chart to ensure repeatability and simplified maintenance.

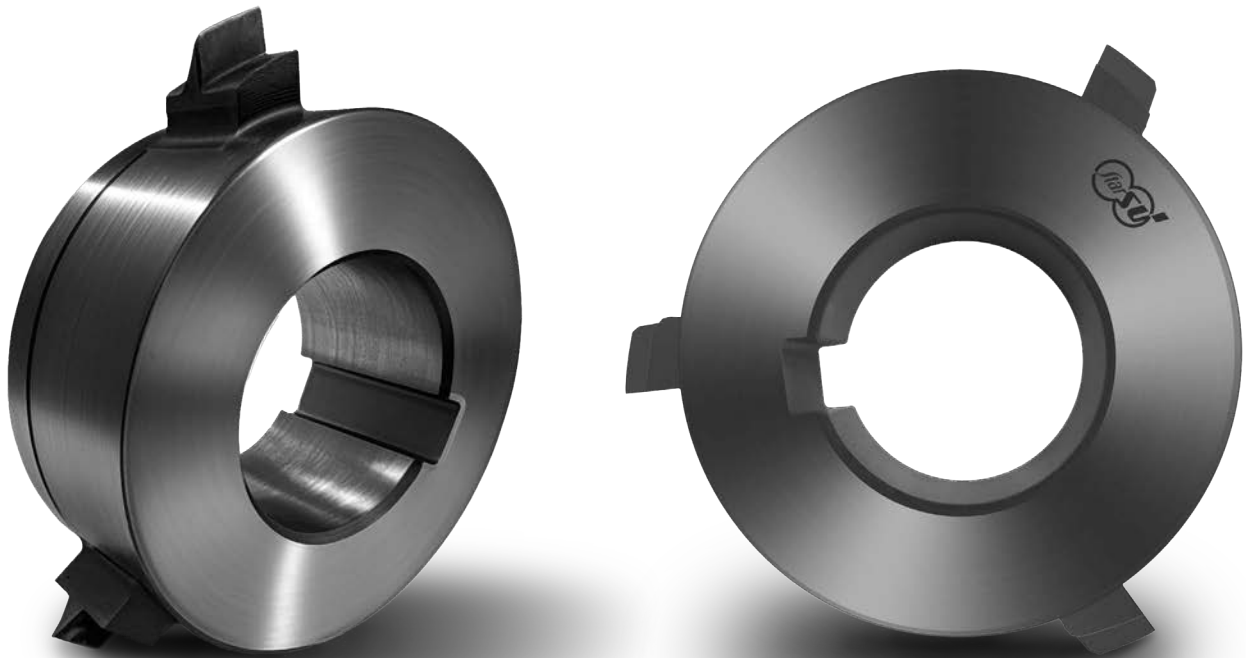

Material

- PM HSS
- Super Alloy HSS
- Carbide

Coating

- AlCrN (Alcrona Pro)
- AlCrN-based (Alcrona EVO)
- AlCrNX (Altensa)
- Other coatings upon request

SOLUTIONS FOR CHAMFERING, DEBURRING AND ROLLING

Chamfering Tools

- For spur or helical gears
- For straight or inclined gear lateral surfaces

Deburring Tools

- P Type (Standard tool for straight gear lateral surfaces)
- P 1000 type (Like P type but grooved)
- PR type (with alternate sections for straight gear lateral surfaces radiused to the root)
- PR 1000 type (grooved tool for straight gear lateral surfaces radiused to the root)
- A 1000 type (grooved tool for inclined gear lateral surfaces)
- A 1000 type (grooved tool for inclined gear lateral surfaces)
- AR 1000 type (same as A 1000 type but radiused to the root)
- SPR 1000 type (special tool for chain sprockets)
- T 1000 (grooved tool for chamfering turning chamfers on the tooth tip)




Rolling Tools

- For spur or helical gears
- As single tool or separate tools
- Rolling tools for burrs and internal toothing

Chain Sprocket Deburring & Rolling Tools

Developed exclusively to deburr chain sprockets, the specially adapted form of the SPR 1000 type has exactly the same profile as the flank radius of the gear tooth and, therefore, any burrs from the lateral surface of the gear teeth.

The chain sprocket roller tool profile also corresponds to the gear tooth profile. The special tapered form of the tool tooth prevents material from building up along the gear tooth profile during the contemporary deburring operation. These tools can be used on any standard chamfering machine.

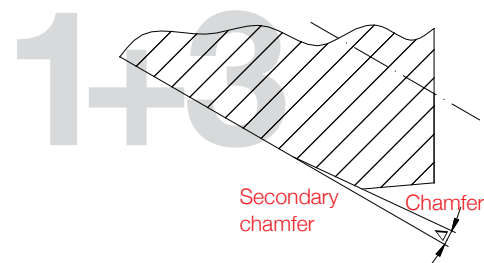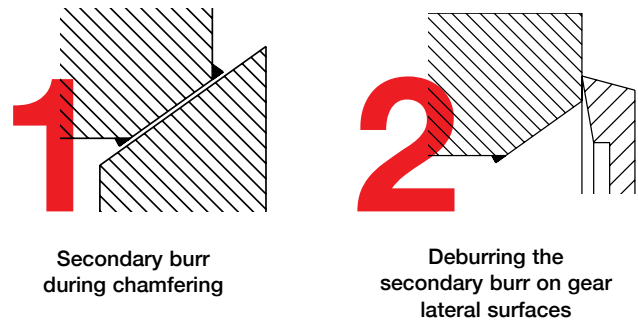

Rolling is performed by a localized "levelling out" action which may be described as a second chamfer with a chamfering angle Δ of about 1° .

Chamfer-roller tools

- For gears with parallel chamfers
- For gears with comma type chamfers

With our chamfer-roller tool, you can chamfer and roll your gears at the same time. The secondary burr that is generated during chamfering is removed in the very same operation.

By combining both processes, the machine utilizes just one tool head, leaving second tool head free for another operation.

TOOL GROUPS



Back: Monoblock chamfering and deburring solution on one tool head

Front: set of rolling tools on one tool head

Chamfering/Deburring

- Use of two tool heads
- Subsequent operation: shaving or profile grinding

Chamfering/Deburring/Rolling

- Use of three tool heads, one for each single tool
- Rolling tool used as a third single tool with surface contact between rolling tool and workpiece flank
- Subsequent operation – continuous generating grinding, shave grinding, honing

Chamfering & Deburring/Rolling

- Use of two tool heads, chamfer-deburring tool on one tool head and rolling tool on a second tool head.
- Subsequent operation: continuous generating grinding, shave grinding
- Requirements: without step, no use of any 1000 type deburring tools.

Chamfering & Deburring

- Monoblock solution
- Use of one tool head mounted with a combined chamfer-deburring tool
- Requirements: without step, no use of any 1000 type deburring tools.
- Subsequent operation – continuous generating grinding, shave grinding, honing

Chamfering & Deburring/Rolling

- Use of two tool heads, chamfering tool on one tool head and deburring tool on a second tool head.
- Subsequent operation: continuous generating grinding, shave grinding, honing

Chamfering & Deburring/Rolling


- Monoblock solution
- Use of one tool head mounted with a chamfer-roller tool with a combined deburring tool.
- Requirements: without step, no use of any 1000 type deburring tools.
- Subsequent operation – continuous generating grinding, shave grinding, honing

Why chamfer and deburr?

- A burr which is not removed may break off during use and damage bearings or gears in gearboxes.
- Over-carbonizing may result in too much pressure being exerted on sharp gear lateral surfaces, which might then break.
- A hardened burr may lead to pre-mature wear of tools in subsequent finishing operations
- Removal of very sharp burrs reduces the risk of tool handling injuries.

Why roll?

- The rolling operation serves to remove the material that builds up on the tooth flanks by plastic deformation during chamfering.
- Over-carbonizing may result in too much pressure being exerted on sharp gear lateral surfaces, which might then break.
- During chamfering/deburring, structural material changes in the form of compression may occur. The rolling process levels out the surface and causes the material to sink.

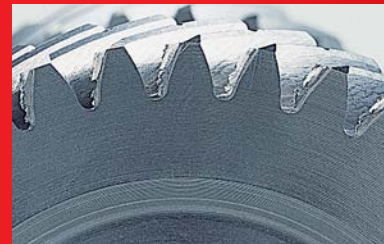

Workpiece after hobbing.



Workpiece after chamfering and deburring.



Rolling of a chain sprocket gear.

SHAVING CUTTER

GUARANTEEING SUPERIOR QUALITY AFTER EACH SHARPENING PROCESS

Shaving Cutter Types

As one of the largest producers of gear cutting tools worldwide, and with particular expertise in shaving technology, we offer a wide range of shaving cutter types:

- Transverse
- Diagonal
- Underpass
- Plunge
- Semi-finished or finished shaving cutters
- All tools are supplied with inspection and lead test charts

Dimensions

- Module: 1-10 mm
- Max. width: 65 mm
- Outside diameter: 170-280 mm

Material

Choose from different conventional HSS or powder metals.

Design and Optimization


Tool design and optimization are rooted in the longstanding experience of our shaving cutter design engineers. Unique software developments implemented on our shaving cutter grinding machines and test programs mean high precision and efficient resharpening of your tools.

Sharpening Diagrams For Continuous Life Cycle Control


Star SU delivers each tool with a user-friendly sharpening diagram, enabling you to monitor the life cycle of your tool and directly control the sharpening process, ensuring you can optimize this high quality process.




Transverse Shaving

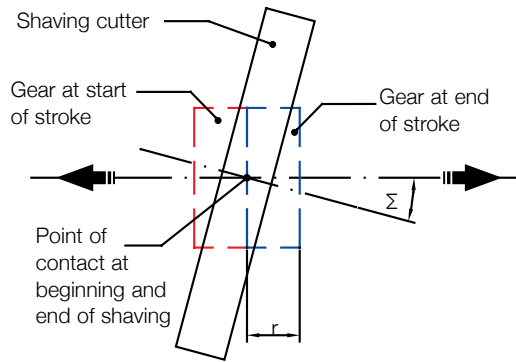

Diagonal Shaving

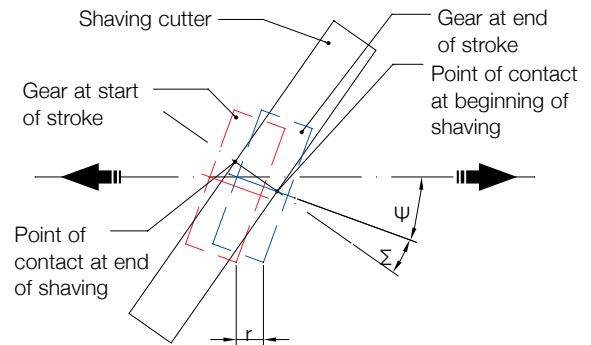


Plunge Shaving*

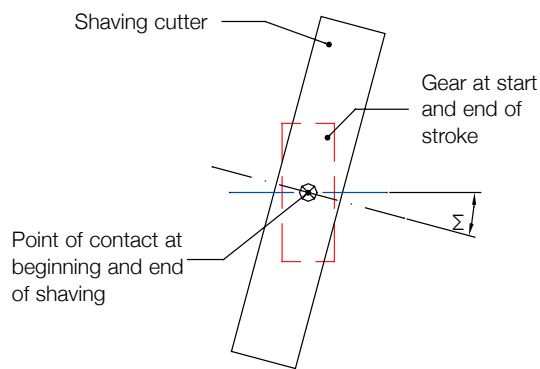

* particularly used in the automotive industry.

Underpass Shaving

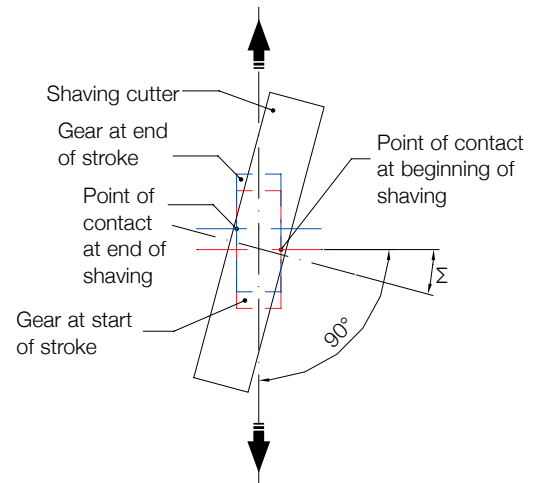

TWISTING PROFILES MADE EASY

Our software solutions are the cornerstone of our solutions. Tool design and optimization are based on unique in-house software implemented on our shaving cutter grinder machines. Additionally, Star SU shaving cutters are profile ground and sharpened on the most modern and production machines available in the market.

PRECISION FOR MEASURING, SETTING, CALIBRATION AND CORRECTION

Types

- Master gears for single and double gear flank and runout measurement
- Setting masters to adjust and calibrate quality control instruments
- Rolling gears to measure noise
- Rolling gears to reduce burrs and nicks
- Plug and ring gauges

Dimensions

- Module: 0.8 - 6.0
- Diameter: 40 - 300 mm
- Tooth width: 4 - 80 mm
- Helix angle: 0 - 45 deg.
- Quality: 2 - 6, DIN 3962
- Diameter: 40 - 300 mm
- Geometry: DIN 3970 or according to drawing corrections
- Profile and flank corrections
- Topological corrections



Material

- Gauge steel
- High speed steel
- PM steel

Coatings

PVD coatings for HSS/PM master gears only

- TiN (Gold)
- TiAlN (Futura Nano)

Gauge master gears steel do not withstand temperatures exceeding 450°C and are therefore unsuitable for coating. Protective coatings may only be applied to HSS/PM master gears.

Plug Gauges

- Module: 0.5 - 6
- Pitch diameter: 20 - 150 mm

Ring Gauges

- Module: 0.5 - 7.0* mm
- Ring outside diameter: 20 - 200 mm
- Straight and helical teeth
- Involute and special profile

* depending on outside diameter



CONSULTANCY, ANALYSIS, OPTIMIZATION

Our experienced engineering team is readily available to address any profile analysis or design inquiries. Existing profiles can be optimized using our internally developed master gear design software.

REGRINDING & RECOATING

Master gears will experience wear and need regrinding to ensure continued quality performance. This service is only available in some of our plants. Ask your contact partner for further information.

MARKING

All Star SU checking and setting master gears are engraved according to DIN 3970, or can be marked with customer-specific data, bearing an individual tracking number that enables them to be carefully monitored throughout the whole production process.

CERTIFIED QUALITY

Master gear design and production processes are all carried out using special Star SU software and modern manufacturing methods.

All Star SU checking and setting master gears are fully tested on CNC inspection equipment and are delivered with a certificate of conformity.

We produce master gears on specially designed and optimised machinery in classes from 2 to 6 to DIN 3962, AGMA and BS standards.

We therefore guarantee both the accuracy of our master gears and the quality of the whole manufacturing process.



HIGH PRECISION ROLLING RACKS

Star SU supplies its customers with a highly efficient and precise rolling racks for cold forming of gears. These high precision tools guarantee the highest contact ratios during forming with minimal thermal effects. Grooves are kept free from debris.

Axial tapering enables easy fitting of spline shafts. Simultaneous machining of several profiles is possible. This service is only available in some of our plants. Ask your contact partner for further information.

Types For




- Gear profiles
- Serrations
- Grooves
- Threads

Quality

- DIN 5480
- ISO 4156
- GOST 6033-51
- ANSI B 92.1-1970
- ANSI B 92.2M-1980

Designs & Dimensions

- Module range 0.3 - 2.0 mm
- Workpiece length, max. 1,000 mm
- Profile length, max. 180 mm
- Helix angle, max. < 25 deg
- Pressure angle > 25 mm

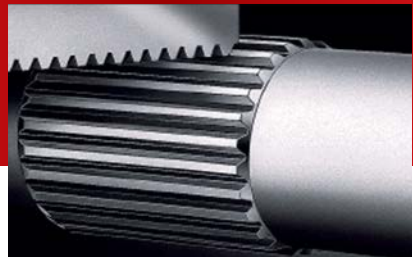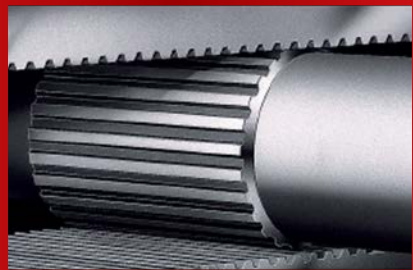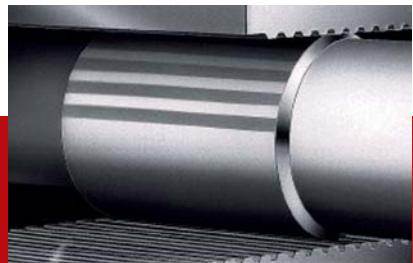

COATING TECHNOLOGY

To ensure a manufacturing line performs to plan, sharpened tools must deliver the same results as coated new tools.

In collaboration with the world's leading manufacturers of coating technology, we optimize innovative coatings for gear cutting tools to improve abrasion resistance, wear resistance and, consequently, tool life. Automated cleaning equipment further optimizes the coating process. Substrates are delivered for coating in a thoroughly clean state to help guarantee the ultimate quality of the coated product.

In-house coating units are integrated in Star SU manufacturing sites all over the world and are frequently updated with the latest process technology. This close cooperation means that any new developments in anti-wear coatings are made available to you immediately.

SHARPENED TOOLS MUST DELIVER THE SAME PERFORMANCE AS COATED NEW TOOLS



COATINGS

BOOST YOUR PRODUCTIVITY!

The coating AlCrN-based (Alcrona EVO) by Oerlikon Balzers is the most innovative coating currently in the market.

Its characteristics enable the attainment of high speeds, huge productivity gains, time savings and cost efficiency. These are just some of the main advantages in utilizing AlCrN-based (Alcrona EVO) on our tools:

- Reduced machining cost
- Reduced wear at high speed
- Longer tool life
- Significant improvement for highest cutting speed conditions for all substrate materials (PM-HSS, MC90, carbide)
- Increased productivity

AlCrN-based (Alcrona EVO) is ideal for markets that require high cutting speeds, such as automotive.





It is recommended in the following processes:

- Hobbing
- Shaping
- Power Skiving

Star SU offers state of the art technology that always provides the best solution possible.





STANDARD COATINGS GUIDE

Composition	Titanium Nitride (TiN) Gold	Aluminum Chromium Nitride AlCrN (Alcrona Pro)	Aluminium Chromium Nitride AlCrNX (Altensa)	AlCrN-based (Alcrona EVO)
Microhardness (HV 0.05)	2,500	3,200	3,800	4490
Friction coefficient on steel (dry)	0.4	0.35	0.35	0.35
Residual compressive stress (GPa)	-2.5	-3	-5	-3.0 to -3.5
Layer thickness (um)	1 - 4	2 - 5	2 - 5	1 - 5
Temperature resistance, max. (C / F)	600 / 1,100	1,100 / 2,000	1,200 / 2,100	1,100 / 2,012
Color	Gold yellow	Bright gray	Gray	Dark gray
Characteristics	The proven coating for general metalworking processes. High hardness and a low friction coefficient enhance wear resistance. Remarkably low chemical affinity with most metals.	Tools coated with AlCrN (Alcrona Pro) can be run with much higher cutting speeds and feeds, so the potential of modern machine tools is tapped to a clearly greater degree.	Tools coated with AlCrNX (Altensa) can work at higher cutting speed than AlCrN (Alcrona Pro) which caters to latest generation machining centers.	Tools coated with Alcrona EVO can work at higher cutting speed than AlCrN (Alcrona Pro) which caters to latest generation machining centers.
Application	Hobs Shaper cutters Deburring tools Master gears/rolling tools	Hobs Shaper cutters Skiving tools Milling cutters	Shaper cutters Skiving tools	Hobs Shaper cutters Skiving tools Milling cutters
Process	Wet cutting (HSS) General purpose	Dry cutting (HSS, Carbide, MC 90) Wet cutting (HSS, Carbide, MC 90)	Dry cutting (HSS, Carbide, MC 90) Wet cutting (HSS, Carbide, MC 90)	Dry cutting (HSS, Carbide, MC 90) Wet cutting (HSS, Carbide, MC 90)
Structure Other coatings available on request	 Single-layer	 Single-layer	 Nano-layer	 Nano-layer

WITH YOU THROUGHOUT THE LIFE OF YOUR TOOL

With Star SU tool service, you benefit from more than 50 years of experience in tool design, manufacture and testing, as well as comprehensive tool management know-how. Today, many of the world's leading gear manufacturers rely on Star SU to manage special tool cribs or to handle their complete tool supply through commodity management supply systems.



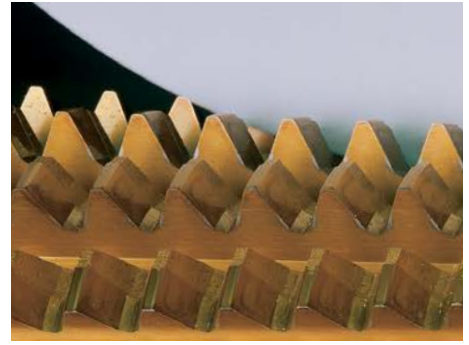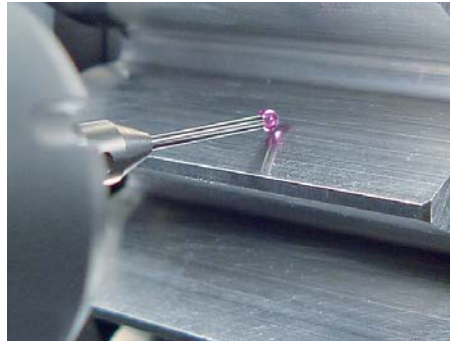

Services

- Project consultancy, design and application testing
- Sharpening of hobs, shaper cutters, shaving cutters, skiving cutters, and power skiving cutters
- Regrinding of master gears
- Stripping, preparation and recoating of tools at our in-house coating centers
- Pickup and delivery service, to and from your tool crib
- CMS for tool groups and product life cycle management of single tool types.

CMS

- Lower direct and indirect labor costs and lower indirect charges.
- Reduced tool storage costs.
- Quality guaranteed by the original manufacturer throughout the complete life cycle of the tool.
- Longer tool life.
- Complete range of services for gear tools from a single source.

Coatings

- TiN (Gold)
- TiAlN (Futura Nano)
- AlCrN (Alcrona Pro)
- AlCrN-based (Alcrona EVO)
- AlCrNX (Altensa)
- Other coatings upon request

STAY CONNECTED

Your Star SU service center helps you enhance the productivity, precision and turnaround of your production tools.



GET IN THE DRIVER'S SEAT

Star SU Total Tool Life Cycle Management meets your every production need by optimizing each step of the tool life cycle and enhancing the cost-per-piece performance of your tools. By guaranteeing a certain cost-per-piece, you need no longer worry about actual tool cost, potential tool life or future servicing requirements.

- Take control of the cost-per-piece performance of your tools.
- Consider all tool supply and maintenance costs.
- Optimize all steps in your process chain in-house
- Keep a check on maintenance costs.



NOTES

[illegible]

Hoffman Estates • Tawas • Farmington Hills • St. Etienne • Dresden • Bologna

Querétaro

Jundiai

Pune • Shanghai

Star SU LLC
5200 Prairie Stone Parkway, Suite 100
Hoffman Estates, IL 60192 USA
Tel.: +1 (847) 649 1450
Fax: +1 (847) 649 0112
sales@star-su.com

Star SU LLC
23461 Industrial Park Dr.
Farmington Hills, MI 48335
Tel.: +1 (248) 474-8200
Fax: +1 (248) 474-9518
quotesandorders@star-su.com

Star SU Federal de México S.A. de C.V.
ACCESO V Nave 20 No. 115-a
Desarrollo La Montaña 2000
Sección III, 76150 Querétaro Mexico
T: +52 442 217 34 45
F: +52 442 217 34 46
sales@star-su.com

Star SU Europe Srl.
Via Bruno Buozzi, 11
40057 Granarolo Dell'Emilia (BO)
Italy
Tel.: +39 (051) 63 19 411
Fax: +39 (051) 37 08 60
info@star-su.eu

Star SU GmbH
Maxstraße 6
01097 Dresden Germany
Tel.: +49 176 305 389 01
Fax: +49 (0371) 576 259
contact@star-su.eu

Star SU France S.a.r.l.
79-81 Rue de la Tour BP 62
42000 Saint Etienne Cedex France
Tel.: +33 (0477) 92 80 50
Fax: +33 (0477) 93 72 03
info-france@star-su.eu

Star SU Indústria de Ferramentas Ltda.
Rod. Dom Gabriel Paulino
Bueno Couto Km 66,3 - C.P. 849
CEP13201 - 970 Jundiai, SP, Brazil
Tel.: +55 (011) 21 36 5199
Fax: +55 (011) 4582 7921
brasil@star-su.com.br

Star SU Machines & Tools (Shanghai) Co., Ltd.
Building 21C, No. 258, Yinlong Road,
Viseen Technology & Industrial Park,
Jiading District,
Shanghai - P.R. China
PC : 201806
T: +86 21 59571302
F: +86 21 59900860
info@star-su.com.cn

Star-SU India Pvt. Ltd.
Gear Cutting Tool Sales
(CIN NO:- U29100PN2011PTC141537)
Registered Address, Plot no- A-106 and 107,
H-Block, MIDC Pimpri, Pune 411018
INDIA
Pritam Jadhav
M: +91 9765444422 /+91 8956750261
Email: pritam.jadhav@star-su.co.in

Arun Jadhav
M: +91 8956750266
Email: arun.jadhav@star-su.com.in



GEAR CUTTING TOOLS

ROUGHING | FINISHING | CHECKING | RECONDITIONING

star-su.com